




Member of the PLENNEGY GROUP

JXS 1200, 1500 & 1800 **SLASHER**

Quick, efficient and trouble-free implement.

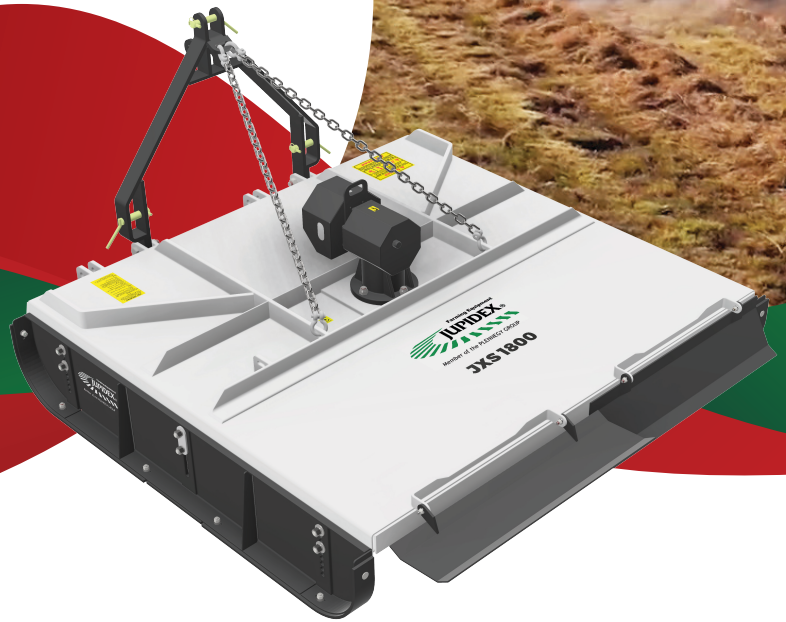


Model	JXS 1200 Slasher	JXS 1500 Slasher	JXS 1800 Slasher
Working width [mm]	1200	1500	1800
Cut height range [mm]	10-100	10-100	10-100
Spindles	1	1	1
Blades per spindle	4	4	4
Blade carrier	Disk	Disk	Disk
Offset available [Y/N]	Y	Y	Y
Width [mm]	1480	1780	2080
Length [mm]	1380	1680	1980
Mass Gross [kg]	307	517	609
Power input Max. [kW]	55	55	55
Tractor power range [kW]	28-45	35-60	40-60
PTO Category	T60	T60	T60
PTO Input speed [rev.min]	540	540	540
PTO Protection [Y/N]	Y	Y	Y
PTO Protection type	Friction Clutch	Friction Clutch	Friction Clutch
Support type	Skid	Skid	Skid
Hitch category [Cat]	2/1	2/1	2/1
Attachment type	3-point	3-point	3-point



Member of the PLENNEGY GROUP

JXS 1200, 1500 & 1800 **SLASHER**

Quick, efficient and trouble-free implement.

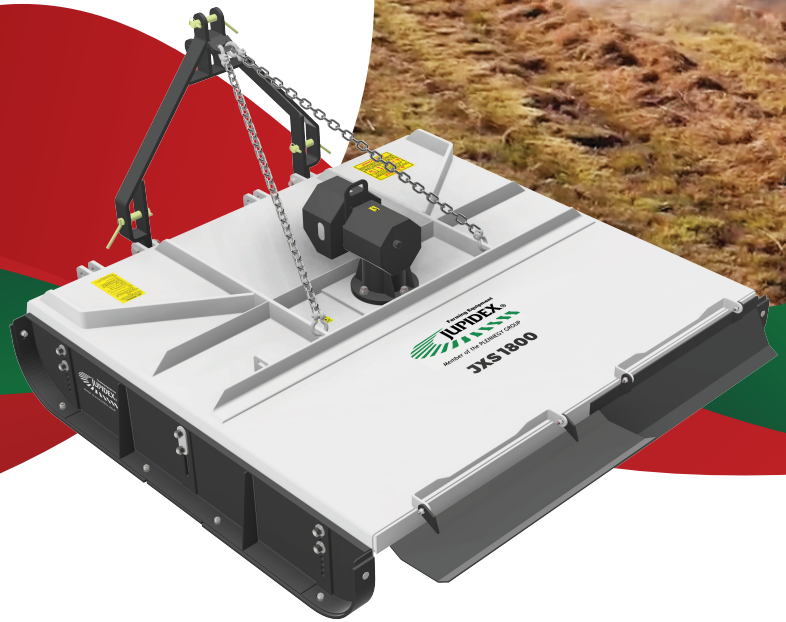

USE: General grass-cutting and slashing using a 28-60 kW tractor.

BENEFITS

- The off-set hitch is standard on both models and permits cutting up to a boundary fence.
- All Jupidex medium-duty slashers are supplied with appropriate, fully guarded PTO shafts and torque-limiting slip-clutches, ready for work.
- Optional over-run clutches can be supplied if required.



+27 33 386 3574



info@jupidex.co.za



www.jupidex.co.za



30 Halstead Rd, Mkondeni, Pietermaritzburg, 3201